



RU-AVR604

Automatic voltage regulator with surge protection

IDEAL PROTECTION FOR




LED / LCD screens, Computer, Audio / Video, Entertainment, Video game console and more...

RU-AVR604

Automatic voltage regulator with surge protection

Protects PC's, tablets, game consoles and peripherals. Smart USB 4 port charger. 4 outlets that protect peripherals and devices. Automatic regulation of high and low voltages.

Capable of reset the overload breaker. User-friendly interface..

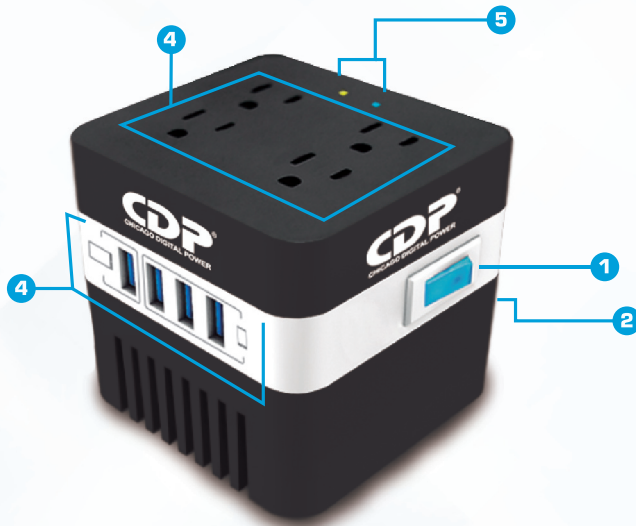

1. On/Off button.
2. AC Input.
3. 4 Surge Protection outputs.
4. USB chargers.
[1 tablet and 3 Smartphone]
5. LED screen.



MODEL		RU-AVR 604
Capacity		600VA/300W
Input	Voltage	120 Vac
	Frequency	50/60 Hz
	Voltage Range	92 Vac - 144Vac
	Max. Input Current (Bypass)	6 Amps / 720W
Output	Voltage	120 Vac
	Frequency	50 Hz - 60 Hz
	Voltage Range	116 Vac \pm 12%
	Number and type of outputs	4 Nema 5-15R
	Power Cord	Nema 5-15P 0.5mm 1M long
	Max. Output Current (Bypass)	6Amps / 300W
Protection	Lightning Overload Protection (Joules)	175
USB		4pcs (2.1A Max.)
LED	On / Off	Blue
	Regulation	Yellow
Physical	Dimension (Length x Height x Depth)	95 x 95 x 95 mm
	Weight (Kg)	0.88
Environment	Temperature	0 - 40°C; 34-104°F (non condensed)
	Acoustic Noise	<40 dBA
Certifications		ISO 9001, ISO 14001, CIDET and NOM

"Specifications subject to change without notice!"



Scan and know our products

Bolivia: 800-100156 **Colombia:** 01800-5181617 **Costa Rica:** 800-435237 **El Salvador:** 800-6773 **Honduras:** 1800-25616099
México: 001800 514 8611 **Panamá:** 011-00800-2268611 **Perú:** 0800-54674 **República Dominicana:** 1888-7514876 **Venezuela:** 0800-1627485